



Project Name:

Location:

Date:

Qty:

## 36W LEDs 4' Two Tube Citadel 2, Clear Diffuser

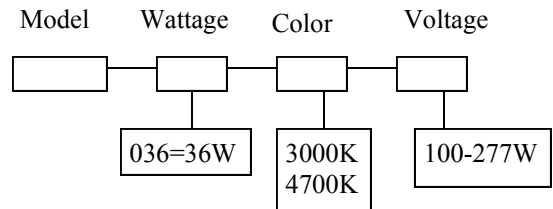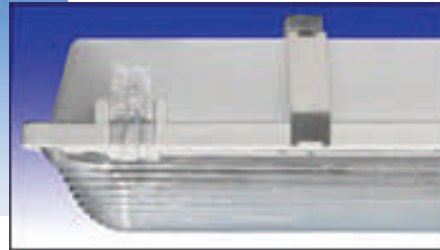

### Electrical Parameters

Input Voltage: 110-277Vac  
 Frequency: 50-60Hz  
 Power Supply Efficiency: >87%  
 Power: 36W  
 PFC: >0.95

### Optical Parameters

LED Luminaries Efficiency: >90%  
 LED Qty: 554pcs total with 2 lamps  
 Lumen (lm): WW 2998Lm +/- 100lm  
 Color-Rendering Index: >81Ra  
 LED Efficiency: 90lm/w  
 Color Temp: WW 3000-4700K

### Ratings:

UL, NSF

### Install Location:

- Food processing facilities
- Commercial kitchen
- Breweries
- Industrial facilities
- Livestock containment buildings
- Parking Garages
- Under Awnings
- Laundries
- Road Tunnels
- Car Washes

### Other Parameters:

Operating Temperature: -20C to 50C  
 Humidity: 15-70%  
 THD: is less than 0.2  
 Size: 30mm x 1200mm or 4'  
 Main Material: Aluminum Alloy + PC  
 Appearance: Transparent  
 IP Rating: IP65  
 30% LED Depreciation: 50,000hrs

### Housing:

CITADEL 2  
 Poured in place Gasket seal  
 Economical Mounting System  
 Very tough Diffusers resist breakage  
 5VA (fl) rated housing materials

### Options:

Wide Distribution Reflector - Additional Cost



3 Year Labor and Part Warranty against manufacturer defect is provided to use under normal operating conditions. Proof of purchase must be provided when warranty service is requested. Notice that improper use or unauthorized repair will not be covered by the warranty. S3J Electronics reserves the right to make changes to this document and to the product without notice.