

Project Name:	Location:	Date:	Qty:
Fixture Type:	Prepared by:	Comments:	

This Entrance Wall Pack Series uses one 10W or a 20W LED Array. The luminous flux is up to 1,821 lm.



### Specifications:

LED Source: One 10W or 20W LED Array

Total Power Consumption: 16W Or 27W

LED Efficiency: 100 lm/W

LED Luminous flux: 1,000 lm, 2,000 lm

Voltage: AC (100 to 277V)

Power Factor (PF): > 0.95

Color Temperature: Day White (4500K - 5000K)

THD: <20%

*Designed to have no direct Glare at eye level.*

Operating Temp: 45°C internal @ 25°C for the 20W LED

LED Luminous Efficiency at Operating Temp: 20W = 1821 lm

CRI: Ra > 80

IP Rating: IP65

Working Temp: -30C to 45C

Environmentally Friendly: NO UV, IR, Lead or Mercury

Supply Rating: 75,000 hours @ 80C

30% LED Depreciation: >50,000Hrs

High Intensity Tempered Glass Cover or Acrylic

Certifications: UL, cUL, Wet Locations, Pending

### Features:

#### Construction:

Rugged one-piece die cast aluminum housing and door frame. One-piece silicone gasket 352protects the optics chamber from performance degrading contaminants.

#### Mounting:

Wall mounting systems for easy installation and maintenance.


#### Finish:

Housing and Arm finished in a 5 stage polyester power coat paint. The finish color is dark Bronze.

#### Reflector:

Premium 95% reflective Anodized Aluminum or Stainless Steel

All segments are rigidly mounted.

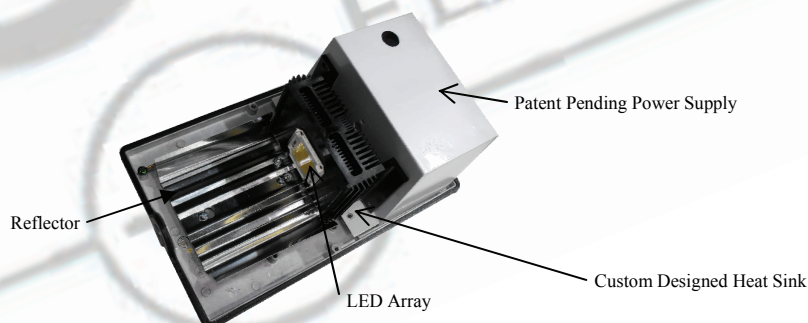

3 Year Labor and Part Warranty against manufacturer defect is provided to use under normal operating conditions. Proof of purchase must be provided when warranty service is requested. Notice that improper use or unauthorized repair will not be covered by the warranty. S3J Electronics reserves the right to make changes to this document and to the product without notice.

